


OKS 8601 BIologic Multi Oil, Spray

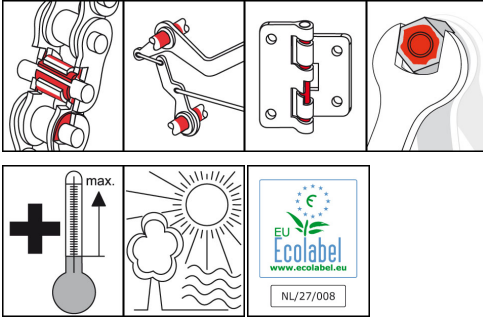

Description

OKS 8601 is a biodegradable multipurpose oil and has been awarded the EU Ecolabel Certificate for particularly environmentally-friendly products.

Applications

- Lubrication of chains and machine elements operated outdoors
- Multi Oil also at higher temperatures

Branches

- Shipbuilding and marine technology
- Chemical industry
- Logistics
- Municipal services
- Paper and packaging industry
- Rubber and plastic processing
- Rail vehicle technology
- Iron and steel industry
- Glass and foundry industry
- Plant and machine (tool) engineering

Advantages and benefits

- Good lubricating properties
- Good creep capacity
- Biodegradable, EU Ecolabel NL/27/008
- VOC-free
- Can be used up to 160°C
- Silicone-free
- Percentage of renewable raw materials > 90%

Application tips

For highest effectiveness, clean the point to be lubricated. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. Apply OKS 8600 evenly with a brush, drip oiler, by immersion or using a suitable automatic lubrication system. Spray OKS 8601 on evenly. Allow the product to soak in before operating. Check compatibility with seals and paintwork before using. Avoid excesses. Observe the plant manufacturer's instructions.

Packaging

- 300 ml Spray



OKS 8601
BIologic Multi Oil, Spray

Technical Data

	Standard	Conditions	Unit	Value
Main components				
base oil				ester
Application related technical data				
marking	analogue to DIN 51 502			CLX 32
viscosity at (40°C)	DIN 51 562-1		mm ² /s	35-40
viscosity class	DIN 51 519		ISO VG class	32
flashing point	DIN ISO 2592	> 79	°C	270
lower operating temperature			°C	-5
upper operating temperature			°C	160
colour				yellowish-light brown
density (at 20°C)	DIN EN ISO 3838		g/cm ³	0.92
Product specific technical data				
biodegradability (21 days)	CEC-L-33-T-83		%	> 90
Properties and approvals				
EU EcoLabel Certificate				NL/27/008

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
 82216 Maisach
 Phone: +49 (0) 8142 3051 - 500
 info@oks-germany.com
 www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark
Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com. Our Customer and Technical service will be pleased to help should you have any further questions.