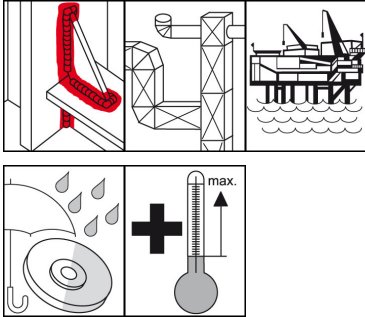


OKS 2511**Zinc Coating, spray**

**Description**

Long-term corrosion protection on zinc basis for initial layer build-up as well as for active cathodic corrosion protection.

Applications

- Touching-up damaged points on galvanised surfaces, for example after welding, drilling or cutting processes
- Priming of ferrous metals when zinc galvanising cannot be carried out. For example, in vehicle and ship repairs, in steel building construction, civil engineering and bridge building, in tank and overhead line construction, on grids, fence and traffic signal posts, exhaust systems, drain gutters
- Also suitable for spot welding thanks to the good electrical conductivity

Advantages and benefits

- Highly effective due to active, cathodic corrosion protection
- Versatile use as durable corrosion protection at thermally stressed metal parts
- Highly economical due to low consumption and self-cleaning spray valve
- Supplements galvanising and forms a rough adhesive surface for subsequent painting

Branches

- Rail vehicle technology
- Municipal services
- Paper and packaging industry
- Iron and steel industry
- Rubber and plastic processing
- Chemical industry
- Shipbuilding and marine technology
- Glass and foundry industry
- Logistics
- Maintenance and servicing
- Plant and machine (tool) engineering



PRODUCT INFORMATION

OKS 2511

Zinc Coating, spray

Application tips

For best adhesion, clean the surfaces. Best way is to clean mechanically first and then with OKS 2610/OKS 2611 universal cleaner. The surfaces to be treated must be bright metal and dry. Shake can for 2 minutes before use. Spray evenly and thinly from approx. 20-30 cm onto the prepared surface (1-2 cross-wise or circular movements). Avoid excesses. Drying times as specified in the following technical data. Repeat the application for thicker layers. Caution: Levelling out and filling not possible on OKS 2511. Process in a temperature range between 10°C and 27°C as well as a relative humidity of more than 80%. Spray valve empty upside down.

Packaging

- 400 ml Spray

Technical Data

	Standard	Conditions	Unit	Value
Main components				
binder				artificial resin mixture
solvent				mixture
solid lubricants				zinc (98.5% pure)
share of solid lubricants	DIN 51 814		percent in weight	38
Application related technical data				
upper operating temperature			°C	400
optimal layer thickness	DIN 50 981/50 984	DIN 50 982-2	µm	60-80
surface covering			m ² /can	approx. 3
processing temperature			°C	10-27
drying time		20°C	min	approx. 15
curing time		at 20°C	h	12
colour				zinc grey
density (at 20°C)	DIN EN ISO 3838		g/cm ³	0.8
salt spray test	DIN 50 021	layer thickness > 70µm	h	700

OKS Spezialschmierstoffe GmbH

Ganghoferstraße 47
82216 Maisach
Phone: +49 (0) 8142 3051 - 500
info@oks-germany.com
www.oks-germany.com



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

Safety data sheet for industrial and commercial users is available for downloading under www.oks-germany.com. Our Customer and Technical service will be pleased to help should you have any further questions.